



ANALYTICAL STUDY FOR COMMON CO₂ CAPTURE TECHNOLOGIES


Dr/ Sameh Tawfik Abd Elfattah Mahmoud

*Assistant Professor, Mechatronics Engineering Department, Alexandria Higher Institute for
Engineering and Technology (AIET)*

Email: sameh.tawfik@aiet.edu.eg, Mob: +20-100-1808-616

Abstract: *The climate change problem as a result of the escalation of carbon dioxide emissions resulting from the combustion of organic materials is one of the most important problems that call for searching for an effective way to get rid of these emissions. CO₂ capture, utilization and storage has been considered as the first option to reduce the climate change phenomenon caused by the utilization of fossil fuels. There are many ways and strategies to capture of atmospheric carbon dioxide such as absorption and adsorption, membranes and chemical rings, moisture and the use of enzymes. This study aims to shed light on simulating the famous techniques used to get rid of carbon dioxide emissions in the atmosphere using the HYSYS program by taking an overview of previous research that dealt with carbon dioxide disposal technologies in order to facilitate the required modifications of these technologies to reach them To the highest possible levels of performance.---*

Keywords: *CO₂ capture, Emission.*

**Nomenclature**A faint, light blue world map is visible in the background of the nomenclature table.

ASU	Air Separation Unit
CCS	CO ₂ Capture Strategy
CCUS	CO ₂ Capture Utilization and Storage
CLC	Chemical looping Combustion
CO ₂	Carbon Dioxide
CPU	Compression and Purification Unit
DD	Down Distillation
DOE	Department of Energy
FB	Fluidized Bed
H ₂ S	Hydrogen Sulphide
IGCC	Integrated Gasification Combined Cycle
MEA	Mono Ethylene Amine
NG	Natural Gas
NO _x	Nitrogen Oxides
PFD	Process flow diagram
SO _x	Sulpher Oxides

WGS Water Gas Shift

INTRODUCTION

Energy and environmental concerns have lately drawn worldwide attention. Although more energy from non-fossil energy sources is being developed, the main energy supply will still come from fossil fuels [1]. As a result, there is an accelerated need for the use of fair and renewable fossil fuels with minimal environmental consequences [2]. As one of the most important greenhouse gases, CO₂ generated by fossil fuel combustion plays an important role in climate change. Among the various sources of pollution, coal-fired power plants are one of the most powerful sources of CO₂ emissions in the world and produce nearly 2 billion tons of CO₂ per year, as shown in Figure.1 [3, 4]

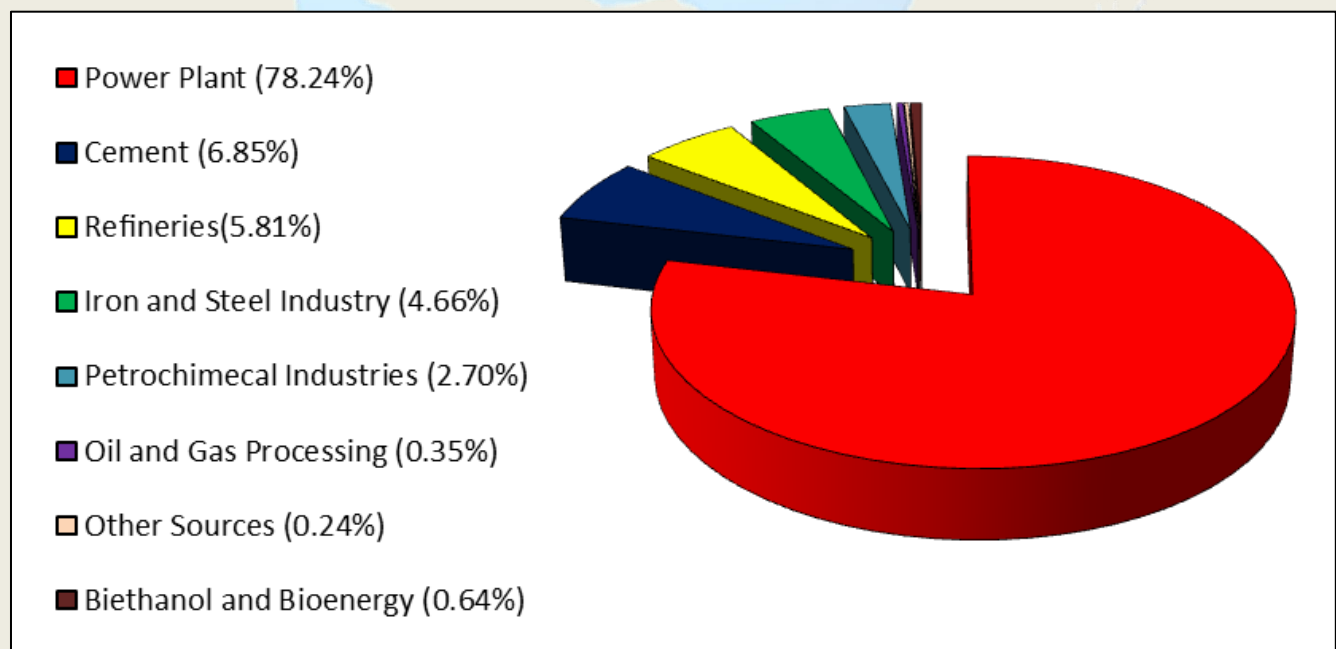


Fig. 1. Percentage of CO₂ emission sources [6].

Global CO₂ emissions have increased rapidly in recent decades, as shown in Figure 2. 2[1].

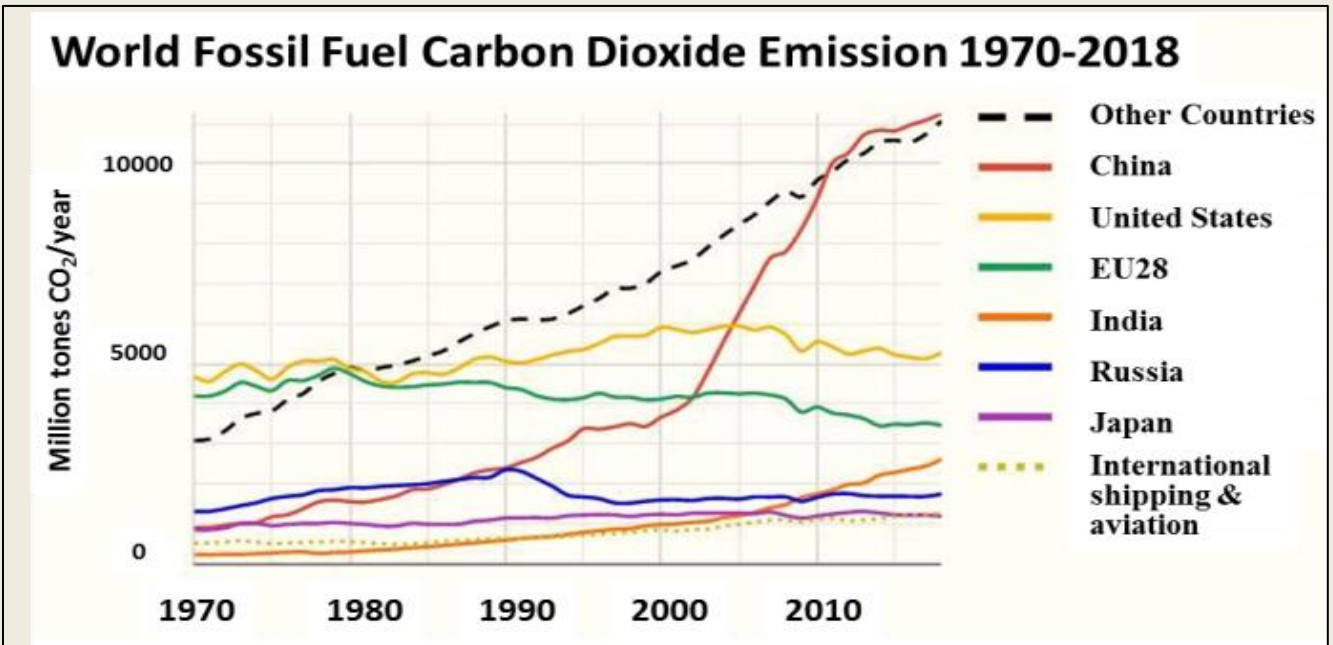


Fig. 2. CO₂ annual emission from fuel combustion [1].

Based on the study of the Intergovernmental Panel on Climate Change, by the year 2100, the environment rising produce up to 570 ppm of CO₂, leading to an increase of about 1.9 ° C in mean global temperature and an increase of about 4 m in average sea level [2]. Collecting, using and processing CO₂ (CCUS) is a viable strategy to reduce CO₂ pollution by collecting it from broad point sources (e.g. Building materials production factories, coal-fired power plants etc.), storing it in the porous rocks (under about 700 m underground) and reusing it for oil extraction, chemical synthesis and fertilizers, etc.[3]. Through retrofitting CO₂ capture and processing systems to a conventional power plant, CO₂ emissions could be lowered through about 80–90 per cent [2]. Various technologies for catching and extracting CO₂ have been extensively researched by scientists, and the key issue is the creation of novel materials or frameworks that will require a minimum energy penalty and an optimum



capture efficiency [4-8]. Although there are many methods for trapping CO₂ from broad pollution sources (i.e. membrane, absorption, adsorption, or cryogenic, etc.), the choice of an effective capture strategy is dependent on particular discharge conditions[9]. The primary criteria are the condition of the flue gas, including its structure, size, flow rate and concentration of CO₂ (i.e., the partial pressure of CO₂). In contrast, the requirements for controlled output (e.g. CO₂ concentration or transport pressure) and discharged criteria (e.g. H₂S, SO_x and NO_x, etc.) also has a strong influence on the application of capture technology [10]. For instance, in order to facilitate transport and processing, CO₂ capture should be condensed to more than 110 bar [11, 12]. This paper will summarize HYSYS simulation for the common CO₂ capture strategies and technologies.

Common CO₂ capture strategies

The major CO₂ recovery techniques from fossil fuel combustion processes are pre-combustion recovery, oxy-fuel capture and post-combustion capture (as seen in Fig. 3) [13]. The selection of a CO₂ capture technique is based primarily on its evaluation and on the conditions of CO₂ pollution (e.g. CO₂ concentration in the flue gas, gas stream pressure), as shown in Tables 1 and [13].

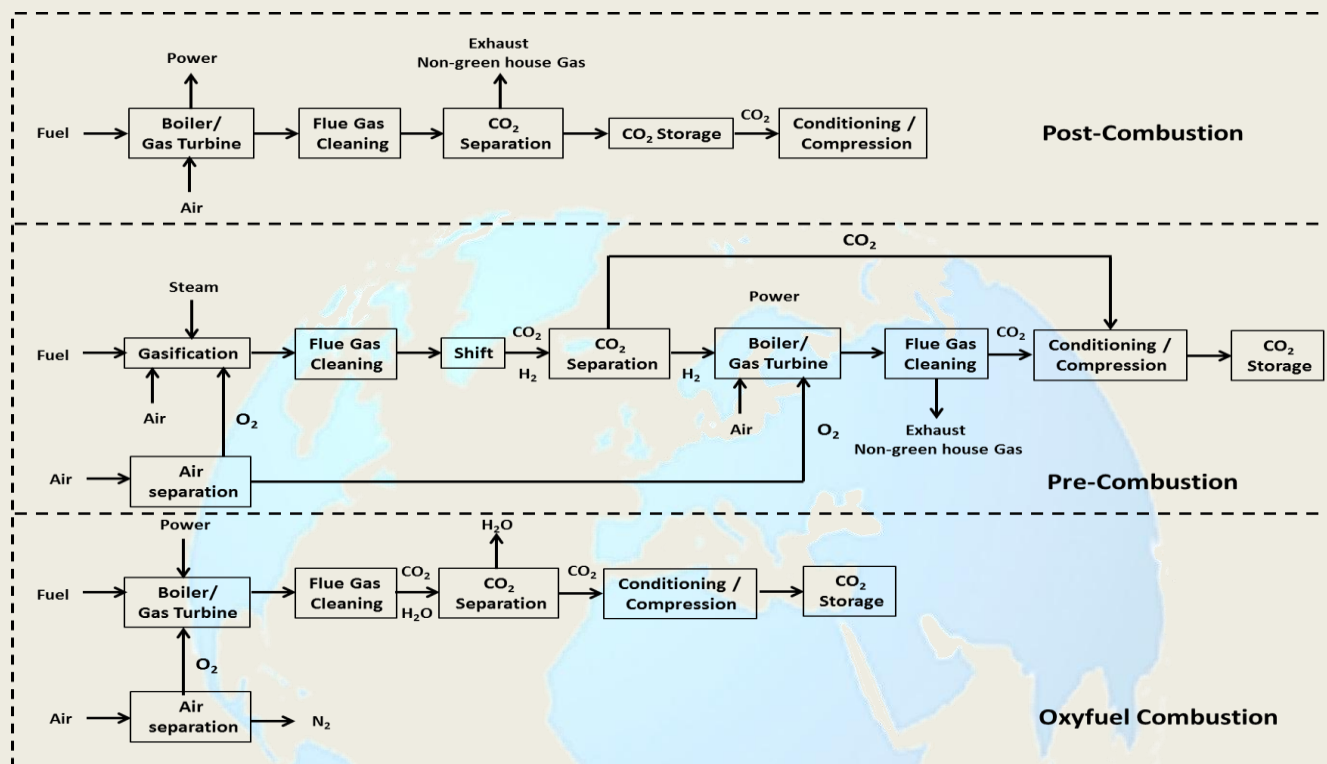

 Fig. 3. CO₂ mitigation strategies for fossil fuel combustion.

 Table.1. Evaluation of the common CO₂ capture strategies.

CO ₂ capture strategies	Advantages	Disadvantages	Ref.
Pre-combustion	<ul style="list-style-type: none"> • High CO₂ concentration (~45 vol%) and pressure 	<ul style="list-style-type: none"> • Severe operating conditions (15–20 bar and 190–210 °C) 	[14, 15]
	<ul style="list-style-type: none"> • Commercial applied in some industrial sectors 	<ul style="list-style-type: none"> • Energy penalty due to sorbent regeneration 	
Oxy-fuel combustion	<ul style="list-style-type: none"> • Lower capital cost 	<ul style="list-style-type: none"> • High efficiency drop and energy penalty due to ASU 	[16, 17]
	<ul style="list-style-type: none"> • High CO₂ concentration (80–98%) 		
	<ul style="list-style-type: none"> • Low investment of boiler and 		

	other equipments		
Post-combustion	<ul style="list-style-type: none"> Refitting a straightforward approach 	<ul style="list-style-type: none"> Dilute CO₂ concentration (5–15 vol%) at near atmospheric pressure 	[14-16, 18-22]
	<ul style="list-style-type: none"> More mature than other strategies 	<ul style="list-style-type: none"> Energy penalty due to solvent/sorbent regeneration 	

Table .2. Flue gas composition of different CO₂ capture strategies.

Composition of flue gas	Pre-combustion [23, 24]	Oxy-fuel Combustion [9, 25]	Post-combustion [23, 24]
CO ₂	37.7%	85.0%	10–15%
N ₂	3.9%	5.8%	70–75%
H ₂ O	0.14%	100 ppm	5–10%
H ₂	55.5%	–	–
O ₂	–	4.7%	3–4%
CO	1.7%	50 ppm	20 ppm
NO _x	–	100 ppm	< 800 ppm
SO _x	–	50 ppm	< 500 ppm
H ₂ S	0.4%	–	–

Pre-combustion CO₂ capture

In the pre-combustion capture process, fuel reacts with O₂ and H₂O. During the reaction, the carbon in the fuel is converted to CO₂ and CO, and simultaneously, H₂ is produced. After the water-gas shift (WGS) reaction, CO is converted into CO₂, and the main components in the mixed gas (namely, syngas)



are approximately 60–80% H₂ and 20–40% CO₂[7]. This capture strategy is mainly used for coal gasification in an integrated gasification combined cycle (IGCC). The significant advantage of pre-combustion is that the produced H₂ is an ideal green energy source because its combustion emits no waste gas and only generates water[26]. Meanwhile, H₂ can be used in many areas, such as in fuel batteries, new energy vehicles, the aerospace industry, chemical industry, etc.[27].

Oxy-fuel combustion CO₂ capture

In the oxy-fuel combustion CO₂ capture process, fuel combusts in pure O₂, causing a high CO₂ concentration (over 80%) in the flue gas, and thus, in this process the purification of CO₂ is more easy than that in post-combustion strategies[28, 29]. Moreover, the NO_x content in the flue gas is also lower with oxy-fuel combustion. Due to the combustion taking place in pure O₂, the high temperature flue gas is often recycled to the combustor to recover waste heat. Currently, oxy-fuel combustion is usually accompanied by pulverized coal combustion, and fluidized bed (FB) combustors could be a promising alternative technology. The greatest advantage of a fluidized bed combustor over pulverized coal oxy-fuel combustion is its ability to reduce the flue gas flow for a given coal input while maintaining a high furnace temperature [29]. The greatest challenge is that the efficiency of coal-fired power plants would be reduced by 10–12% if oxy-fuel CCS utilities were retrofitted to it, due to the air separation unit (ASU) and compression and purification unit (CPU) [30]. To capture CO₂ in an efficient way by oxy-fuel combustion, the energy penalty caused by the need for an ASU and CPU must be further minimized via optimization of the process and heat integration



Post-combustion CO₂ capture

In the post-combustion CO₂ capture process, fuel combusts in the air. In the conventional combustion process, the concentration of CO₂ in the flue gas is low (typically 4–14%) of the atmospheric pressure [20]. For this reason, there is a rigorous demand for energy and equipment to enable CO₂ separation and achieve the required CO₂ concentration (above 95.5%) for transport and storage [18]. Compared with pre-combustion and oxy-fuel combustion, post-combustion CO₂ capture units can be directly added to existing coal-fired power plants with little retrofitting, and this method has been demonstrated at some pilot-scale sites. As one of the most mature post-combustion CO₂ separation technologies, the energy requirements for solvent regeneration in the (MEA) absorption process vary from 3.0 to 4.5 MJ/kg CO₂, which contributes to approximately 80% of the total energy consumption [19, 20]. In contrast, a target of 2 MJ/kg CO₂ (including both the capture and compression steps) is often mentioned in the European Union recommendations [22, 31].

Principals of CO₂ capture technologies

Currently, several CO₂ separation technologies are in use, such as membrane, absorption, adsorption, and cryogenic, etc. Each of these systems are focused on a number of separation standards. For this purpose, the choice of suitable technology of various sources of industrial pollutants are important for achieving high efficiencies and performance depends on different parameters (e.g. flow conditions, flue gas composition, target products and economics)[32].

Absorption

Mono-ethanolamine (MEA) absorption is the most common technique used for post-combustion CO₂ recovery, with two segments of absorption and stripping / desorption, as shown in Figure. 4.

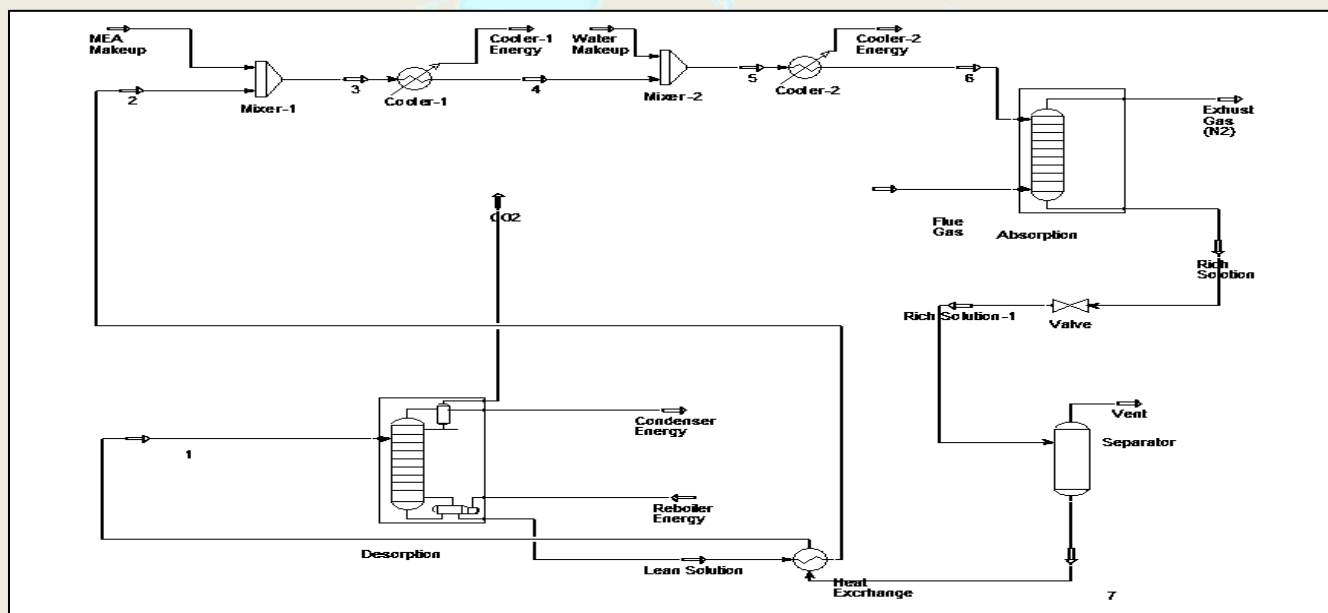


Fig. 4. PFD for chemical CO₂ absorption system

It has the ability to achieve a high level of CO₂ capture (more than 90%) of flue gas by rapid kinetics and strong chemical reactions. There are, however, some residual shortcomings that need to be discussed, including solvent deterioration, oxidation and solvent regeneration efficiency[33]. Amines are corrosive and susceptible to trace constituent degradation (in particular SO_x) which severely restricts the application of this technology. According to the study of Rao and Rubin [34], solvent oxidation leads to about 10% of the total cost of CO₂ capture. There are two main types of deterioration:

- i. Thermal degradation which happens under situations of high temperature and strong partial CO₂

concentration.

- ii. Oxidative oxidation, mostly due to the presence of a large amount of O_2 in the flue gas.

Many impurity gasses (e.g. SO_x and NO_x) can also induce solvent oxidation. Volatile elements may be released into the air and are potentially harmful. In fact, the recovery of chemical solvents involves a significant amount of energy (approximately 4–6 MJ / kg of CO_2) [35].

Adsorption

Figure. 5 indicate the standard configuration of the external adsorption of CO_2 . [14]

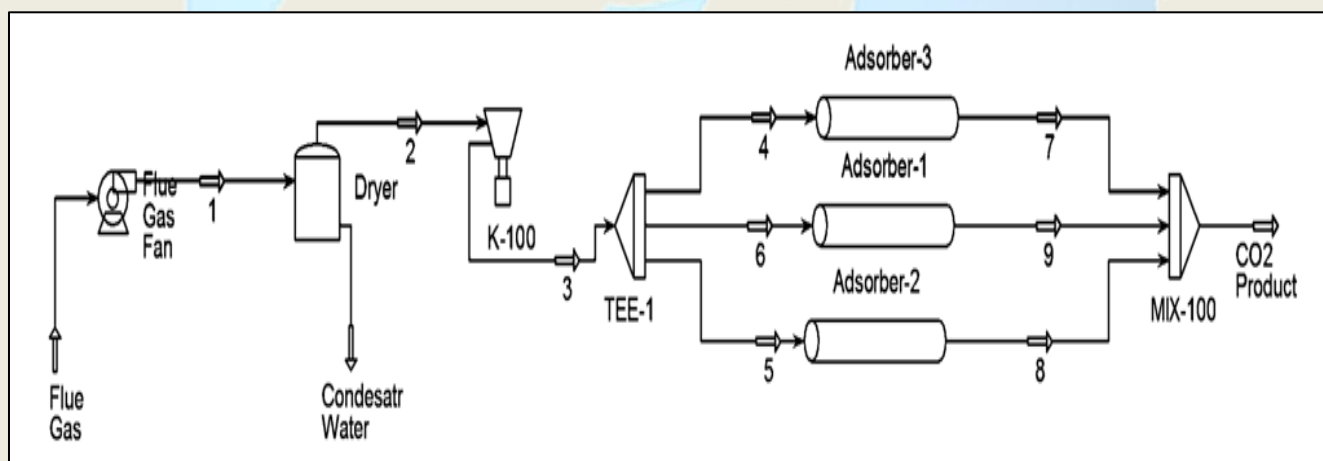


Fig. 5. PFD for the CO_2 capture by adsorption processes

As shown in the graph, a pretreatment phase is required prior to the adsorption of CO_2 . Each of the adsorption chambers are filled with a strong adsorbent (i.e. activated charcoal, zeolites, or natural metal frames, etc.) [36, 37]. There are normally two or three adsorption chambers throughout the entire process, such that, during service, one chamber receives the feed for adsorption, the second chamber desorbs the CO_2 collected, and the third chamber is on standby to receive the feed [38]. The device can

therefore run continuously. To date, many CO₂ adsorption systems are thought to be dry methods.

Certain drawbacks that render this system less effective are [39-41]:

- i. Low CO₂ selectivity and efficiency in the usable adsorbents.**
- ii. Poorer processing performance relative to other techniques such as absorption and cryogenics.**
- iii. Recycling and reusability of adsorbents.**

Membranes

Membranes are a relatively new separation technique and have been investigated for CO₂ capture in recent years. As a viable option, membrane-based technology has become a competitive process for trapping CO₂ due to its usability, energy efficiency and eco-friendliness [42-44]. Figure. 6 indicates a two-stage membrane separation technique utilizing most of the permeate as a sweep, where 70 per cent of the permeate from the first-stage membrane is fed to the second-stage membrane as a feed, and the remaining 30 per cent of the permeate is re-circulated as a sweep to the first-stage membrane[45], while 5 per cent of the permeate from the second-stage membrane is re-circulated as a sweep. This distribution corresponds to approximately 5% of the feed flow rate at each respective membrane stage[45].

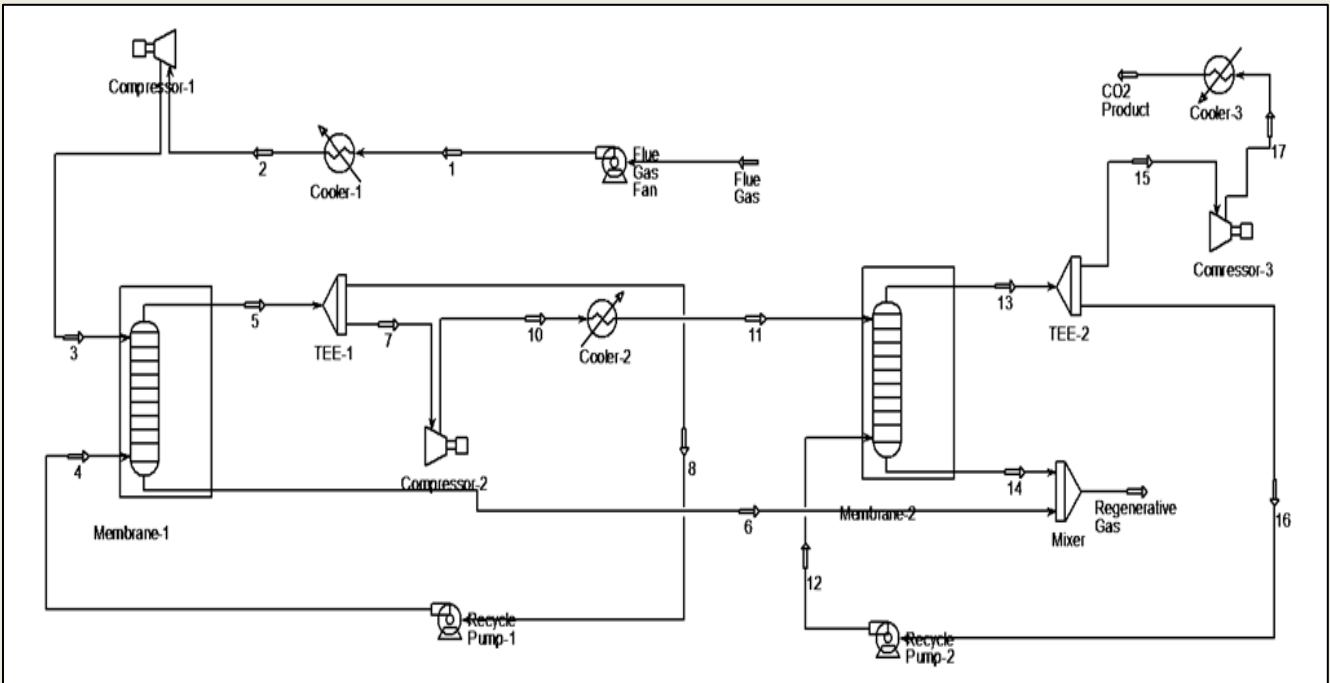


Fig. 6. PFD for the CO₂ capture by membranes

Nevertheless, there are also some negative effects which hinder the final use of membranes [46-48]. First of all, membranes have specific temperature criteria. Their systems will be demolished easily as the temperature of the flue gas reaches 100 ° C [48]. In the meantime, membranes are prone to corrosive gases (e.g. SO_x, NO_x and H₂S); thus, pre-treatment prior to membrane separation is important. Membrane performance over long-term service is difficult to maintain. Most membranes do not have longevity in the practical conditions of the industry and fail quickly, which is one of the greatest challenges for their potential application in industrial practice[49]. In addition, when the concentration of CO₂ in the feed stream is diluted (below 20%), several steps and/or reuse of one of the feed streams are also needed

Chemical looping cycle

Chemical-looping combustion (CLC), suggested by Richter and Knoche [50], splits combustion into intermediate oxidation and reduction reactions, which are conducted simultaneously by a solid oxygen carrier flowing between the separate sections. Small metal oxide fragments, such as Fe_2O_3 , NiO , CuO and Mn_2O_3 [55,56], are ideal oxygen carriers. The simple CLC process with two reactors, one for air and gas, is shown in Figure. 7.

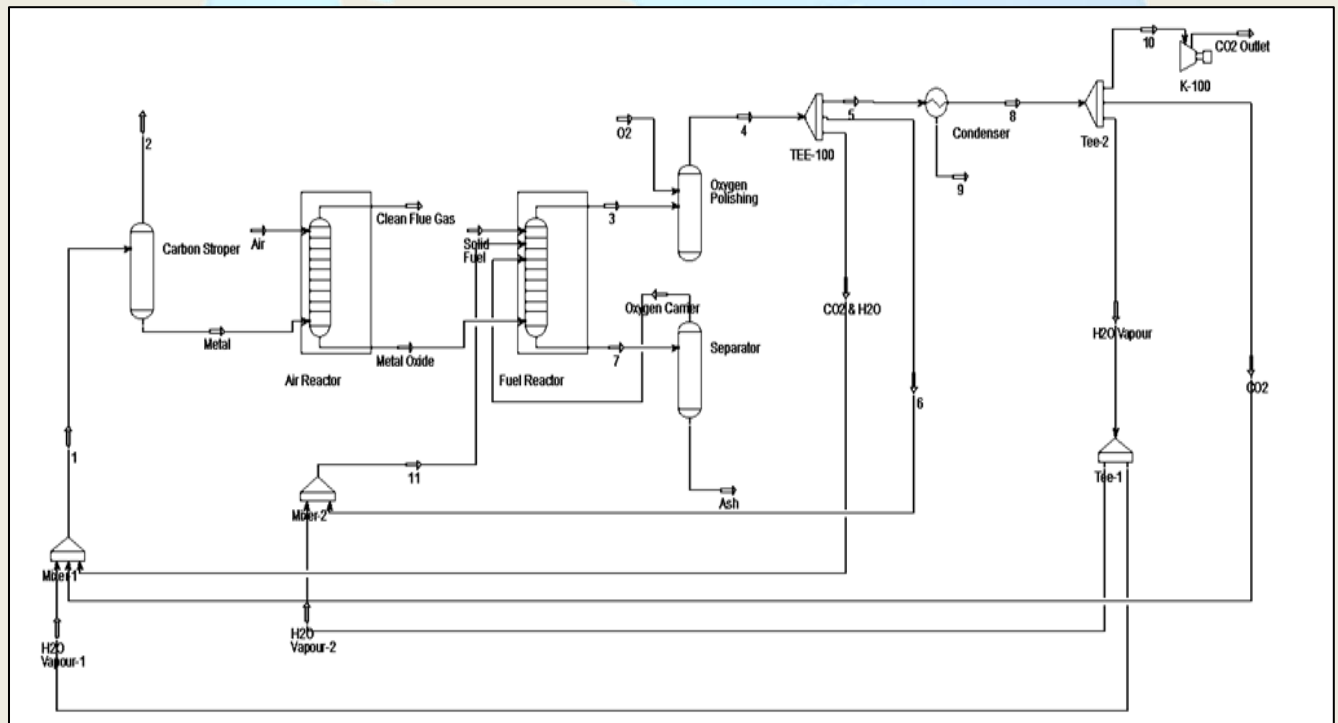


Fig. 7. PFD for the CO_2 capture from by CLC process.

The oxygen carrier is circulating between the reactors. The carrier is oxidized by hydrogen in the water reactor. The metal oxide in the fuel reactor is reduced by the fuel that is oxidized to CO₂ and H₂O. The key benefits of CLC can be summed up as [13, 51]:

- i. The exhaust gas from the air reactor is primarily N₂ and is therefore innocuous.**
- ii. The fuel reactor exhaust gas stream is composed of CO₂ and H₂O; thus, the CO₂ can be easily separated by a condenser that avoids the energy penalty of the traditional absorption technology and reduces the capital cost.**

Currently, the majority of CLC processes have been tested only on a laboratory scale, and there are few large-scale demonstrations of this technology. In the meantime, some significant problems persist throughout existing processes (e.g. loss of stabilization of the oxygen carrier and poor redox kinetics) [52]. In fact, desulfurization of the fuel is also necessary in order to stop the carrier from sulfating

Microalgae

At present, CO₂ bio-fixation through microalgae has gained tremendous traction due to its high photosynthetic efficiency, which makes it possible to bio-fix CO₂ more efficiently than in terrestrial plants [53, 54]. A description method for the fixation of CO₂ microalgae and the processing of biodiesel is presented in Figure. 8. The microalgae capture system has the following benefits [55-57]:

- i. It is an environmentally sustainable method;**
- ii. This makes direct use of solar energy.**
- iii. It co-produces high-value substances from biomass, such as human food and animal feed.**



Due to a lack of awareness of the microalgae CO₂ fixation cycle, many problems are usually ignored (such as the need for an inorganic nutrient supply and the intense resources used in the production, processing and drying of microalgae biomass)[58-60]. The implications of these limitations will contribute to a negative CO₂ and energy balance for the life-cycle of the biodiesel output from microalgae. Apart from that, the poor CO₂ solubility in water is another issue that needs more study.

CONCLUSION

There are many ways and strategies to get rid of atmospheric carbon dioxide such as absorption and adsorption, membranes and chemical rings, moisture and the use of enzymes. This paper aims to shed light on simulating the famous techniques used for CO₂ Capturing from atmosphere using the HYSYS program by taking an overview of previous research that dealt with carbon dioxide disposal technologies in order to facilitate the required modifications of these technologies to reach them To the highest possible levels of performance.

ACKNOWLEDGMENTS

I feel always indebted to Allah, the most merciful and most compassionate and I ask him to make this paper useful for all who read it. I would like to express my extreme gratitude to all those who contributed practically and morally to the achievement of this paper. No words can adequately express my sincere appreciation to Prof. Dr. Mostafa Nasr, Dr. Wageeh Elaskary Dr.Hasnaa Elarwash and for their patience, motivation, and immense knowledge. I would also like to thank all the professors and



staff members of I would also like to thank all the professors and staff members of andria Higer Inestetute for Engineering and technology (AIET), and everyone who cooperated with me in this work.

REFERENCES

1. (IEA), I.E.A. CO₂ emissions from fuel combustion highlights. 2019; Available from: <http://www.iea.org/publications/freepublications/publication/>.
2. Stewart, C., M.-A.J.E.C. Hessami, and management, A study of methods of carbon dioxide capture and sequestration—the sustainability of a photosynthetic bioreactor approach. 2005. 46(3): p. 403-420.
3. Li, L., et al., A review of research progress on CO₂ capture, storage, and utilization in Chinese Academy of Sciences. 2013. 108: p. 112-130.
4. Amrollahi, Z., et al., Optimized process configurations of post-combustion CO₂ capture for natural-gas-fired power plant—Power plant efficiency analysis. 2012. 8: p. 1-11.
5. Zhou, K., et al., Alternative materials in technologies for Biogas upgrading via CO₂ capture. 2017. 79: p. 1414-1441.
6. Alonso, A., et al., Critical review of existing nanomaterial adsorbents to capture carbon dioxide and methane. 2017. 595: p. 51-62.
7. Xu J, W.Z., Zhang C, et al., Parametric analysis and potential prediction of membrane processes



- for hydrogen production and pre-combustion CO₂ capture. Chem Eng Sci ;135:202–16, 2015.
8. Liu, Y., et al., Energy-saving pathway exploration of CCS integrated with solar energy: A review of innovative concepts. 2017. 77: p. 652-669.
 9. Martynov, S., et al., Impact of stream impurities on compressor power requirements for CO₂ pipeline transportation. 2016. 54: p. 652-661.
 10. Song, C., et al., Reducing the energy consumption of membrane-cryogenic hybrid CO₂ capture by process optimization. 2017. 124: p. 29-39.
 11. Skaugen, G., et al., Techno-economic evaluation of the effects of impurities on conditioning and transport of CO₂ by pipeline. 2016. 54: p. 627-639.
 12. Ali, U., et al., Comparative potential of natural gas, coal and biomass fired power plant with post-combustion CO₂ capture and compression. 2017. 63: p. 184-193.
 13. Olajire, A.A.J.E., CO₂ capture and separation technologies for end-of-pipe applications—a review. 2010. 35(6): p. 2610-2628.
 14. Dai, Z., et al., Recent advances in multi-layer composite polymeric membranes for CO₂ separation: A review. 2016. 1(2): p. 102-128.
 15. Nandi, S., et al., A single-ligand ultra-microporous MOF for precombustion CO₂ capture and hydrogen purification. 2015. 1(11): p. e1500421.
 16. Hedin, N., et al., Adsorbents for the post-combustion capture of CO₂ using rapid temperature



- swing or vacuum swing adsorption. 2013. 104: p. 418-433.
17. Tonziello, J. and M.J.E.P. Vellini, Oxygen production technologies for IGCC power plants with CO₂ capture. 2011. 4: p. 637-644.
 18. Leung, D.Y., et al., An overview of current status of carbon dioxide capture and storage technologies. 2014. 39: p. 426-443.
 19. Oh, S.-Y., et al., Energy minimization of MEA-based CO₂ capture process. 2016. 169: p. 353-362.
 20. Abu-Zahra, M.R., et al., CO₂ capture from power plants: Part I. A parametric study of the technical performance based on monoethanolamine. 2007. 1(1): p. 37-46.
 21. Belaissaoui, B., D. Willson, and E.J.C.E.J. Favre, Membrane gas separations and post-combustion carbon dioxide capture: Parametric sensitivity and process integration strategies. 2012. 211: p. 122-132.
 22. Song, C., et al., Natural gas purification by heat pump assisted MEA absorption process. 2017. 204: p. 353-361.
 23. D'Alessandro, D.M., B. Smit, and J.R.J.A.C.I.E. Long, Carbon dioxide capture: prospects for new materials. 2010. 49(35): p. 6058-6082.
 24. Ramdin, M., et al., State-of-the-art of CO₂ capture with ionic liquids. 2012. 51(24): p. 8149-8177.
 25. Kather, A. and S.J.I.J.o.G.G.C. Kownatzki, Assessment of the different parameters affecting the



- CO₂ purity from coal fired oxyfuel process. 2011. 5: p. S204-S209.
26. Ma, Y., et al., Molybdenum carbide as alternative catalyst for hydrogen production—A review. 2017. 75: p. 1101-1129.
27. Deng, X., et al., Hydrogen flow chart in China. 2010. 35(13): p. 6475-6481.
28. Stanger, R., et al., Oxyfuel combustion for CO₂ capture in power plants. 2015. 40: p. 55-125.
29. Mathekga, H., B. Oboirien, and B.J.I.J.o.E.R. North, A review of oxy-fuel combustion in fluidized bed reactors. 2016. 40(7): p. 878-902.
30. Escudero, A.I., et al., Minimization of CO₂ capture energy penalty in second generation oxy-fuel power plants. 2016. 103: p. 274-281.
31. Belaissaoui, B., et al., Hybrid membrane cryogenic process for post-combustion CO₂ capture. 2012. 415: p. 424-434.
32. Miller GQ, S.J., Selection of a hydrogen separation process. In: Proceedings of the NPRA annual meeting. San Francisco, CA, USA, 1989.
33. White CM, S.B., Granite EJ, Hoffman JS. J Air Waste Manag Assoc 2003;53:645–715, Separation and capture of CO₂ from large stationary sources and sequestration in geologic formations-coal beds and deep saline aquifers.
34. Rao, A.B., E.S.J.E.s. Rubin, and technology, A technical, economic, and environmental assessment of amine-based CO₂ capture technology for power plant greenhouse gas control.



2002. 36(20): p. 4467-4475.
35. Brunetti, A., et al., Membrane technologies for CO₂ separation. 2010. 359(1-2): p. 115-125.
36. Gao, W., et al., Molten salts-modified MgO-based adsorbents for intermediate-temperature CO₂ capture: A review. 2017. 26(5): p. 830-838.
37. Samanta, A., et al., Post-combustion CO₂ capture using solid sorbents: a review. 2012. 51(4): p. 1438-1463.
38. Thiruvengkatachari, R., et al., Post combustion CO₂ capture by carbon fibre monolithic adsorbents. 2009. 35(5): p. 438-455.
39. Yancheshmeh, M.S., H.R. Radfarnia, and M.C.J.C.E.J. Iliuta, High temperature CO₂ sorbents and their application for hydrogen production by sorption enhanced steam reforming process. 2016. 283: p. 420-444.
40. Ebner AD, G.M., Chisholm NG, Black QT, Mumford DD, Nicholson MA, et al., Suitability of a solid amine sorbent for CO₂ capture by pressure swing adsorption. . Ind Eng Chem Res;50:5634–41, 2011.
41. Bamdad, H., et al., A review on common adsorbents for acid gases removal: focus on biochar. 2018. 81: p. 1705-1720.
42. Vinoba, M., et al., Recent progress of fillers in mixed matrix membranes for CO₂ separation: A review. 2017. 188: p. 431-450.



43. Sreedhar, I., et al., Process and engineering trends in membrane based carbon capture. 2017. 68: p. 659-684.
44. Evangelos PF, F.K., Sergios KP, Andreas AS, Athanasios CM., A review of the latest development of polyimide based membranes for CO₂ separations. React Funct Polym. 2017.
45. Hussain A, H.M.A.J.M.S., feasibility study of CO₂ capture from flue gas by a facilitated transport membrane. 2010.
46. Ho MT, A.G., Wiley DE. Reducing the cost of CO₂ capture from flue gases and u.m.t.I.E.C.R. 2008;47:1562–8.
47. Dai, Z., et al., Precombustion CO₂ capture in polymeric hollow fiber membrane contactors using ionic liquids: porous membrane versus nonporous composite membrane. 2016. 55(20): p. 5983-5992.
48. Wang, M., et al., Recent advances on mixed matrix membranes for CO₂ separation. 2017. 25(11): p. 1581-1597.
49. Zhang, Y., et al., Current status and development of membranes for CO₂/CH₄ separation: A review. 2013. 12: p. 84-107.
50. Richter HJ, K.K.R.o.c.p.A.S.S. and 1983;235:71–85.
51. Adanez, J., et al., Progress in chemical-looping combustion and reforming technologies. 2012. 38(2): p. 215-282.



52. Solunke RD, V.G.I.d.w.C.-c.i.c. and c.F. 2011;90:608–17.
53. Lam, M.K., K.T. Lee, and A.R.J.I.J.o.G.G.C. Mohamed, Current status and challenges on microalgae-based carbon capture. 2012. 10: p. 456-469.
54. Razzak, S.A., et al., Biological CO₂ fixation with production of microalgae in wastewater—a review. 2017. 76: p. 379-390.
55. Pires JCM, A.-F.M., Martins FG, Simões M. Carbon dioxide capture, f.f.g.u.m.e.a.a.b. concept., and R.S.E.R. 2012;16:3043–53.
56. Zhou, W., et al., Bio-mitigation of carbon dioxide using microalgal systems: advances and perspectives. 2017. 76: p. 1163-1175.
57. Zeng, X., et al., Microalgae bioengineering: from CO₂ fixation to biofuel production. 2011. 15(6): p. 3252-3260.
58. Cheah, W.Y., et al., Biorefineries of carbon dioxide: from carbon capture and storage (CCS) to bioenergies production. 2016. 215: p. 346-356.
59. Goli, A., et al., An overview of biological processes and their potential for CO₂ capture. 2016. 183: p. 41-58.
60. Kroumov, A.D., et al., A systems approach for CO₂ fixation from flue gas by microalgae—Theory review. 2016. 51(11): p. 1817-1832.